Quitérios®

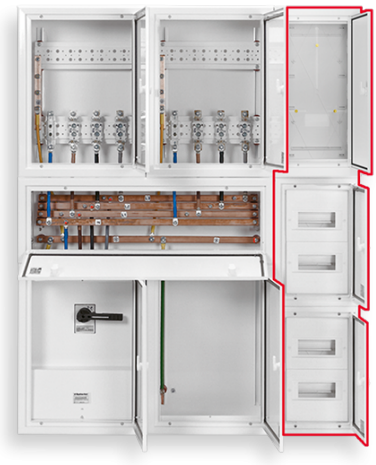

DATASHEET

00146456

COMMON SERV ASSEMB ENCL W/O RCD 24MD W250xH1000

Dimensions WxHxD (mm)	250x1000x200
Rows x Modules	3x8
No. Frames for DIN rail	3
Locking System	Triangular plastic cam lock + key
Color	White - RAL 9010
Tariff Code	85371099
Observations	Class II Insulation Enclosures, with aluminum frame and door. Meter box according to DMA-C62-805/N 2nd Ed, for ECCE meter installation.

Materials

Enclosure	Plastic - PSHI
Frame and door	Aluminium

Protection and Security

Insulation Class	Class II Insulation
IP Protection Degree	54
IK Protection Degree	07
Static Load	200kg/m3
Installation Temperature	Mín: -5ºC Máx: 40ºC

Electrical Features

Ue	230V/400V~
Ui	500V
degree of pollution	3
Frequency	50Hz
Icc (kA)	10kA

Standardizing Documentation

Standards	EN 62208
Directive	2014/35/UE
Regulations	RTIEBT

Nota: The image may not correspond to the product code shown. Please refer to the technical specifications.

Document subject to change without previous notice