


mondego[®]
IP65







+60104




+60106




+60108

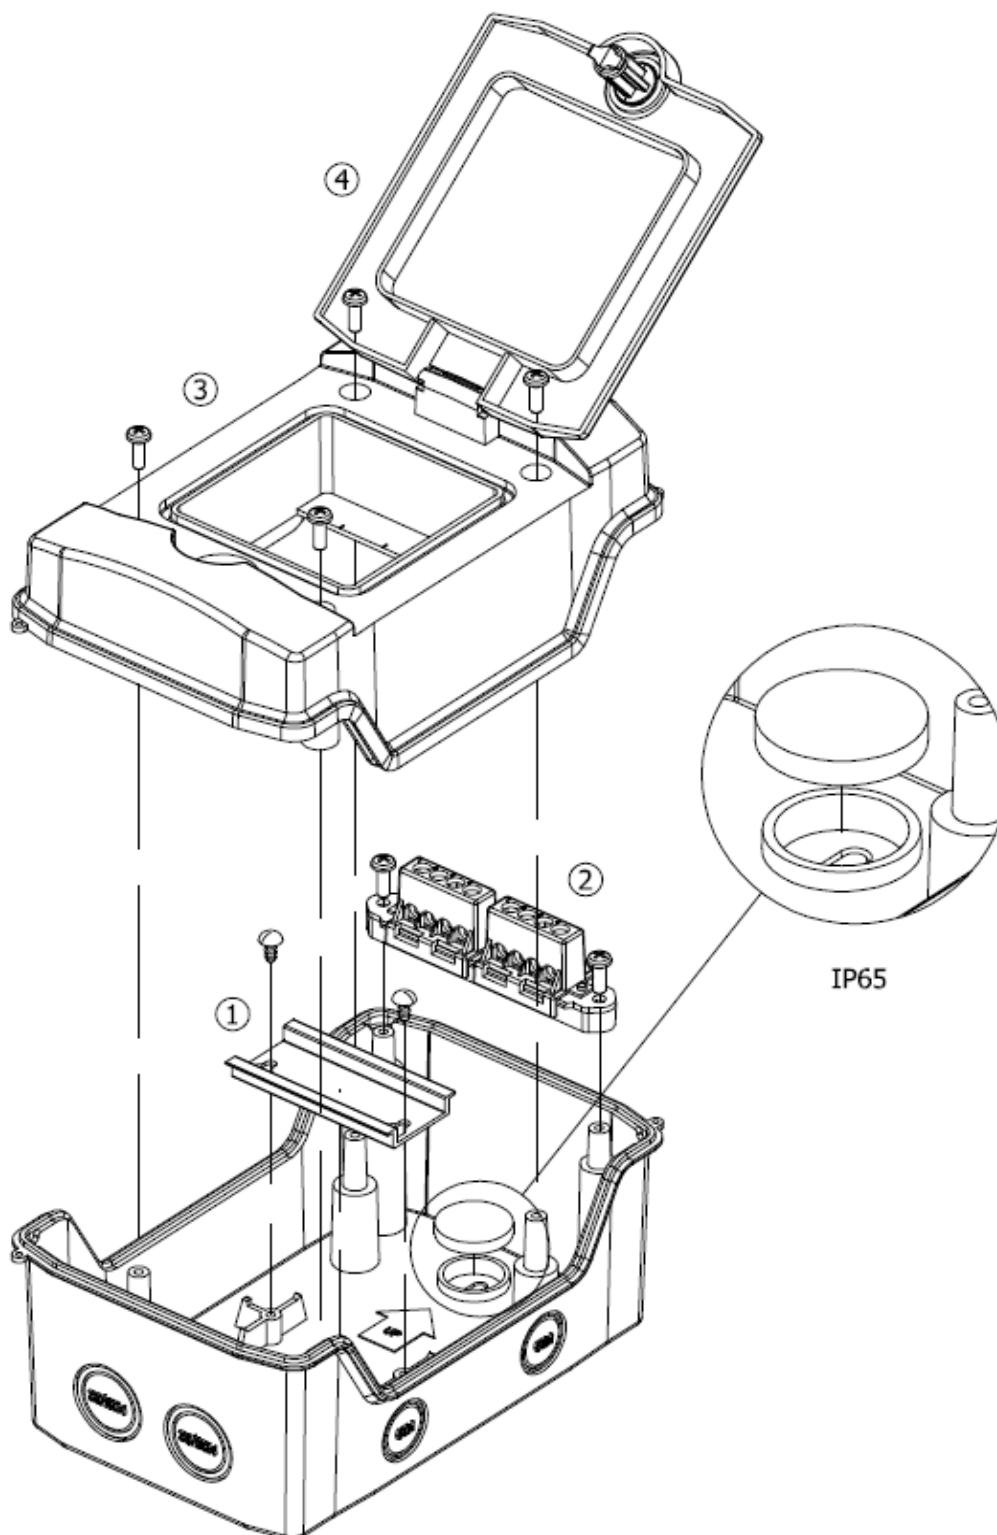



+60112

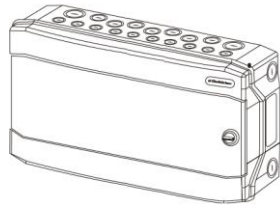


+60118




+60212




+60312

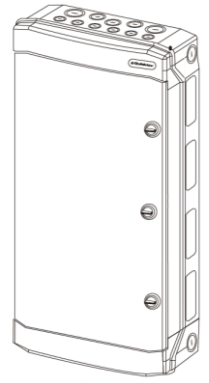

+60412

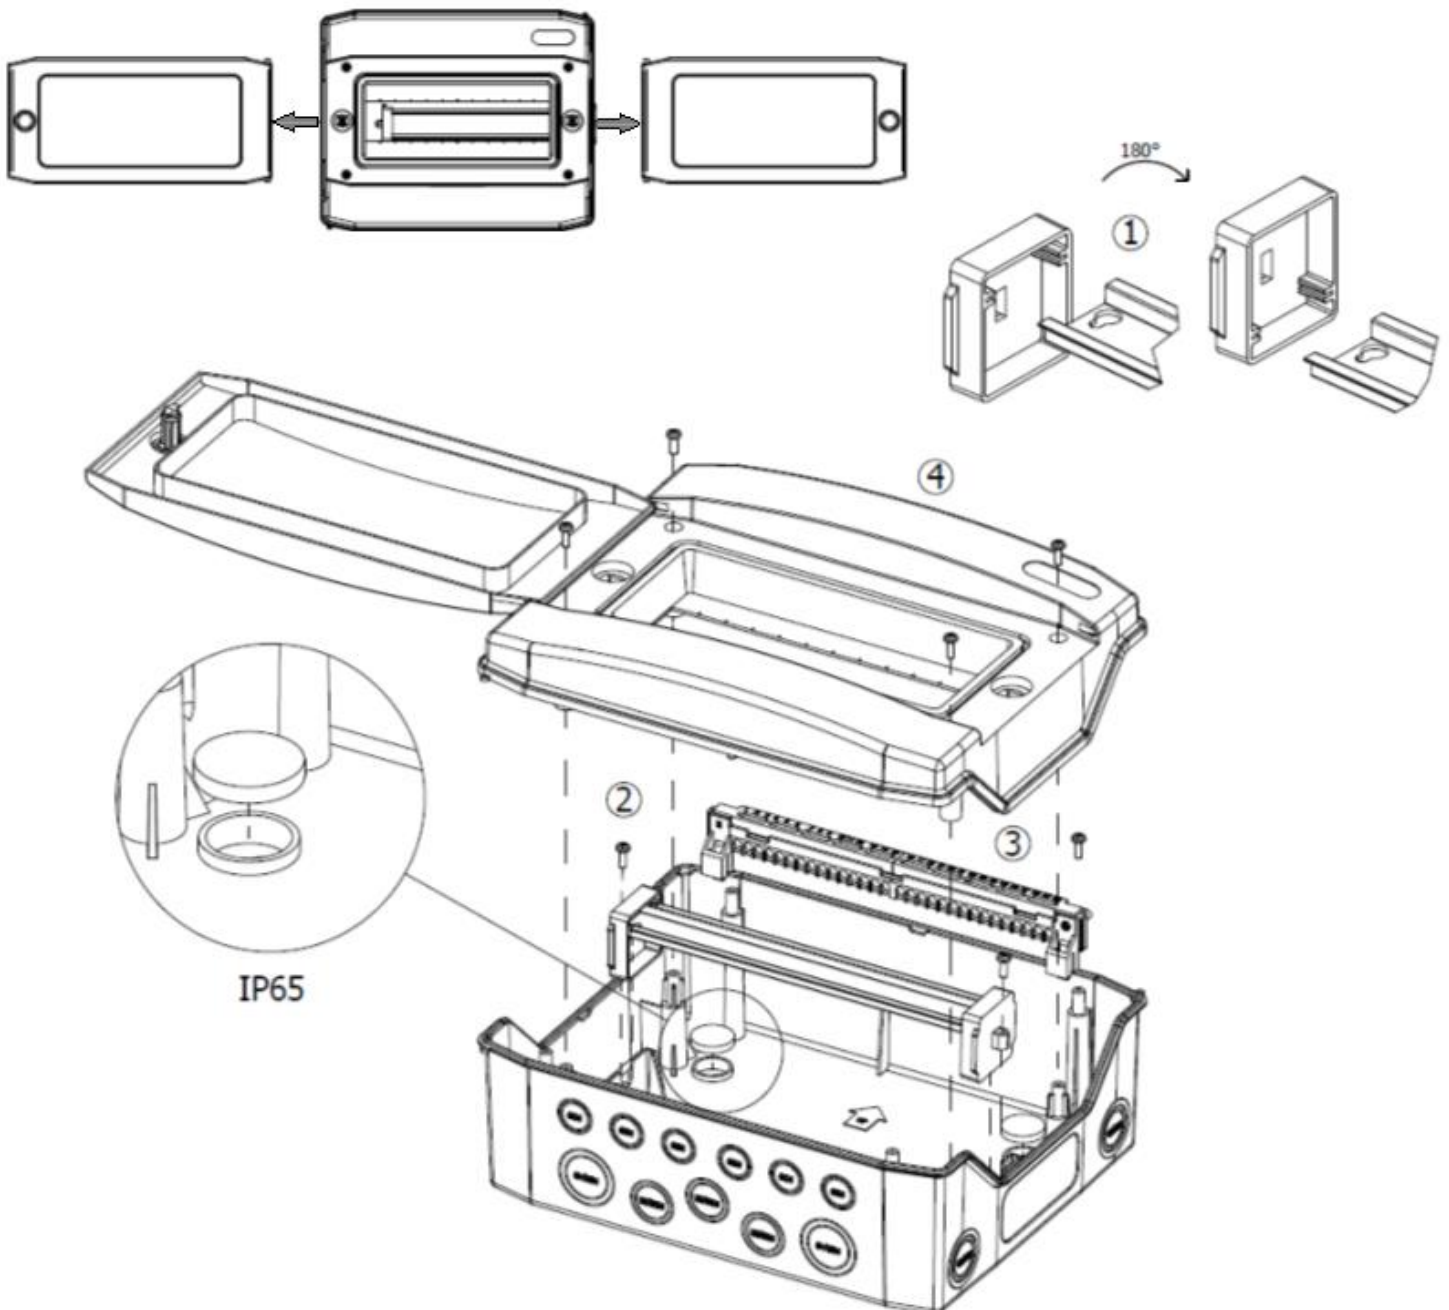

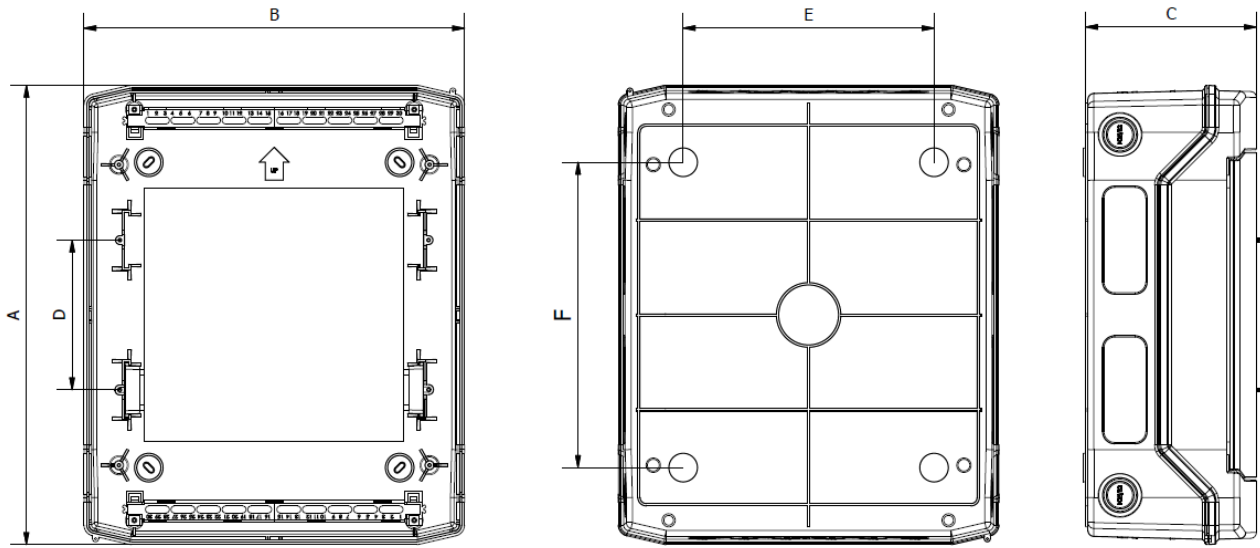

Cod. المرجع	Mod. الحجم	Dim(mm) الأبعاد (مم)						Pde (W) الطاقة المتبددة 30K	In (A) جهد التيار	Un (V) شدة التيار	Obs ملاحظات
		A	B	C	D	E	F				
+60104	1x4	200	128	120	-	78	111	10	63A	400V a.c. (التيار المتناوب) 1500V d.c. (التيار المباشر)	IP65 IK08 EN 62208 (IEC 62208) -20°C +70°C
+60106	1x6	200	165	120	-	63	140	11			
+60108	1x8	200	202	120	-	100	140	13			
+60112	1x12	256	319	144	-	210	130	16			
+60118	1x18	259	428	142	-	259	130	20			
+60212	2x12	384	319	144	125	210	255	24			
+60312	3x12	535	319	144	125	210	380	26			
+60412	4x12	664	319	141	125	210	505	28			

ACESSÓRIOS | ACCESSORIES | ACCESSOIRES | ACCESORIOS | الكماليات




IP67

M16 → M50



IP67

M16 → M32



+61310

BARRAMENTOS | BUSBAR | BORNIERES | EMBARRADOS | أطراف التوصيل

+60104	+60106	+60108	+60112	+60118	+60212	+60312	+60412
1xN: 4x16 [□]	1xN: 6x16 [□]	1xN: 8x16 [□]	1xN: 10x16 [□]	1xN: 15x16 [□]	2xN: 10x16 [□]	2xN: 15x16 [□]	2xN: 20x16 [□]
1xPE: 4x16 [□]	1xPE: 6x16 [□]	1xPE: 8x16 [□]	1xPE: 10x16 [□]	1xPE: 15x16 [□]	2xPE: 10x16 [□]	2xPE: 15x16 [□]	2xPE: 20x16 [□]
			<p>16mm²</p>		<p>10mm²</p>		